


Tare Function


The tare function allows you to weigh another item consecutively after weighing the first item without removing it from the scale.



Gently press the  button to turn on the scale.



The scale LCD display will show its start routine of segment as it powers on.




Wait until the "0" is shown on the display. Put the container on the scale platform.





The LCD display will show the steady weight of the container.




Press the  button to clear the weight of the container (reset to zero).



The top-left corner will show icon , it means the Tare function is activated.




Add the ingredients into the container.



The LCD will show the weight of the ingredients only. Repeat pressing the  button to weight new different ingredients.

Negative value




The display will show a negative value (see LCD functions) if a weight has been removed from the scale. Please press the  button to clear the negative value, the display will show "0" again.

Error Indication




The "Lo" symbol on display indicates that the battery power is running low. Please replace new battery.




The "Err" symbol on display indicates that the scale is over-loaded. Please remove excessive load immediately to avoid possible damage to the product.

Care and Maintenance



- Place the scale on a solid level surface before use.
- Avoid hitting or dropping the scale otherwise damage may occur.
- Do not overload the scale or put heavy things on the scale when not use.



- Treat the scale with care as it is a highly precise electronic instrument.
- Do not immerse this product in water or any other liquid. Please keep surface dry.
- Clean the scale with a soft damp cloth, do not use chemicals or harsh abrasives.

Battery Advice



- If the scale is not to be used for long periods, it's recommended to remove the battery to avoid damage to the scale due to possible battery leakage.
- Keep the batteries out of reach of children.



- Do not mix old and new batteries, with different compositions or of different brands to prevent possible leakage, explosion.
- Do not heat or deform the batteries or expose to fire.



- Waste batteries should not be disposed of with household waste.
- Please check with your local authority for battery recycling advice.



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.



Electronic Kitchen Scale

Instruction Manual

ATLAS

Warranty: This scale is backed by a 10-year manufacturer's warranty. For any questions or problems not answered in this manual please contact us at:
Optima Home Scales
PO Box 1526 Cumming GA 30028 United States
Tel: 888-688-4833 www.optimahomescales.com

Please read the instructions carefully before operating.

Product Feature

- Equipped high precision strain gauge sensor system
- Max Capacity:5kg/11lb:0.4oz 5000ml/176fl'oz
- Division:1g/0.1oz 1ml/0.1fl'oz
- Manual on / Manual off / Auto off
- Tare function
- Measure volume of water and milk
- Two weight units: g-lb:oz
- Two volume units: ml-fl:oz
- Low battery/ over-load indication

Button Functions



Manual on / Manual off / Zero / Tare




Unit Conversion: g-lb:oz, ml-fl:oz
Mode Conversion: weight<-->milk volume<-->
water volume

LCD Display Functions




— :negative value
T :tare weight
ml : volume unit


g : weight unit
lb:oz: weight unit
fl:oz: volume unit

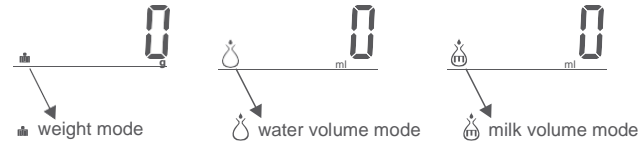


To Insert or Replace Battery



1. On the base of the scale, gently remove the battery cover as per the arrow direction.




2. Insert 2x AAA batteries into the compartment observing the polarity markings in the base.



3. After inserting the batteries, replace the battery cover and push the cover backward.


Before usage

Please remove the silicone sensor protector before usage.

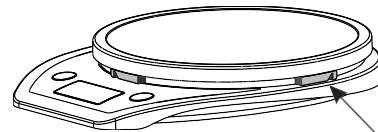

four silicone sensor protectors

Operation




Before use, place the scale on a solid, level surface. Place any container or bowl (if used) on the scale before operation .



Gently press the TARE button to turn on the scale.




The scale LCD display will show its start routine of segment as it powers on.



Wait until the "0" is shown on the display.



Place the item to be weighed on the scale (or in the bowl if required). The LCD will show the weight reading.



After weighing press, the TARE button for 3 seconds to turn off the sale. Or leave the scale and it will automatically power off in 2 minutes.

Unit Conversion

The scale has six weighing modes. To measure different items, users can select required weighing mode by pressing the "UNIT" button to convert the desired weighing mode, weight mode, water volume mode or milk volume mode. At the left corner of the LCD screen, it shows the status of the weighing modes. See above LCD Display Functions.

